


**Product Specifications**

|  |                         |                     |
|--|-------------------------|---------------------|
| <b>Style Number</b>                    | VV492                   |                     |
| <b>Construction</b>                    | Solid Polymer Core      |                     |
| <b>Edge Profile</b>                    | Accent Bevel            |                     |
| <b>Nominal Dimensions</b>              | 7" wide, 48" long       |                     |
|  | <b>US Units</b>         | <b>Metric Units</b> |
|  |                         |                     |
| <b>Actual Product Width</b>            | 7.2"                    | 18.29 cm            |
| <b>Actual Product Length</b>           | 48.03"                  | 122 cm              |
| <b>Wear Layer Thickness</b>            | 20 mil (0.02")          | 0.5 mm              |
| <b>Overall Product Thickness</b>       | 0.196"                  | 5 mm                |
| <b>Attached Underlayment</b>           | Attached Cork           |                     |
| <b>Attached Underlayment Thickness</b> | 0.039"                  | 1 mm                |
| <b>Finish</b>                          | UV Acrylic              |                     |
| <b>Installation Methods</b>            | Floating or Direct Glue |                     |
| <b>Profile</b>                         | Angle/Tap               |                     |
| <b>Country of Origin</b>               | Imported                |                     |

**Packaging**

|                         |             |           |
|-------------------------|-------------|-----------|
| <b>Area per Box</b>     | 28.84 sq ft | 2.68 sq m |
| <b>Pieces per Box</b>   | 12 pcs      |           |
| <b>Weight per Box</b>   | 48.5 lbs    | 21.99 kg  |
| <b>Boxes per Pallet</b> | 50 boxes    |           |

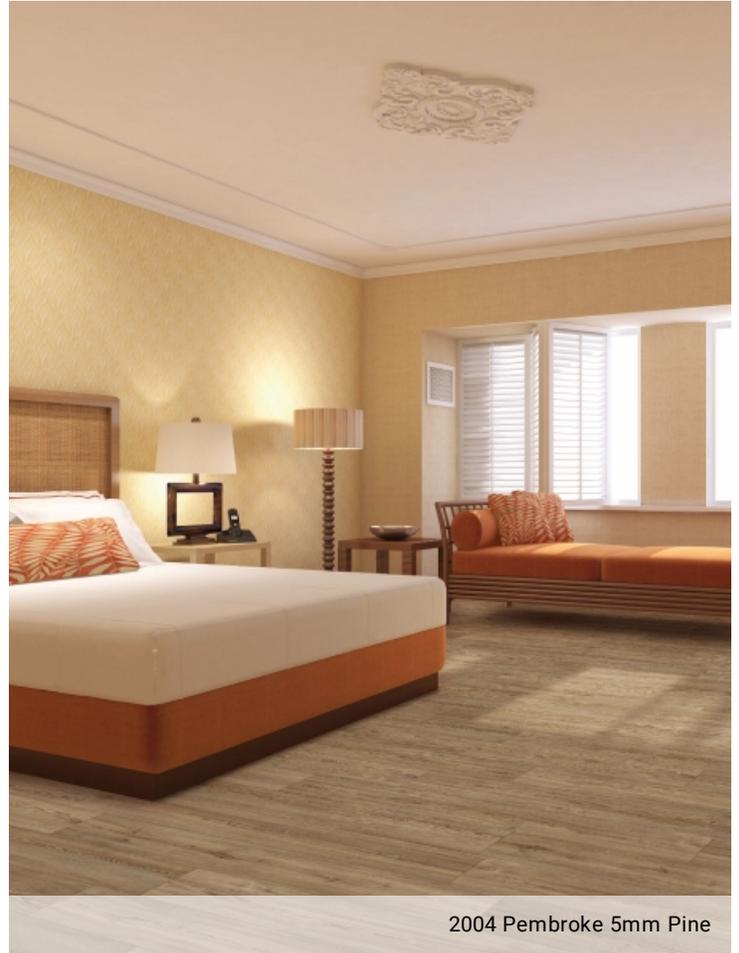

2004 Pembroke 5mm Pine

**Colors**



2004 Pembroke 5mm Pine

2006 Flint 5mm Oak

2010 Lancaster 5mm Bamboo

# COREtec Pro Plus Enhanced Planks

## Performance

---

|                                     |                 |
|-------------------------------------|-----------------|
| Static Load (ASTM F970)             | Passes          |
| Residual Indentation (ASTM F1914)   | Passes          |
| Resistance to Chemicals (ASTM F925) | Passes          |
| Smoke Density (ASTM E662)           | Passes          |
| Radiant Panel (ASTM E648)           | Passes, Class I |
| Slip Resistance (ASTM D2047)        | ADA compliant   |

## Warranties

---

- USF Lifetime Limited
- USF 15 Year Heavy Commercial

## Certifications

---

GreenGuard (Certification, Gold, Private Label) Certified